



optimal 2500



Tree Spade



Requirements for Power Unit:

A Wheel Loader

- 1 extra hydraulic circuit, double-acting, for implement attachment at front
- hydraulic working pressure 200 - 230 bar (2,900 - 3,340 lbs./in²)
- oil flow 100 - 120 l per minute (22 - 34 GPM)
- tipping load approx. 22.000 kg (48,400 lbs.)
- lift capacity approx. 13.000 kg (28,600 lbs.)
- type of attachment quick-change frame or frame for fixed attachment
- controls: electro-hydraulic valves control element

B Truck

- wheel formula: 6 x 6
- payload: 19.800 kg (43,560 lbs)
- permissible rear axles load, min.: 2 x 13.000 kg (2 x 28,600 lbs.)
- permissible gross weight min.: 33.000 kg (72,600 lbs.)
- length of superstructure, min.: 540 cm (213")
- overhang max.: 80 cm (32")
- wheelbase min.: 390 cm (154")
- PTO drive: hydraulic pressure: 200 - 230 bar (2,900 - 3,340 lbs./in²)
- oil flow: 100 - 120 l per minute (22 - 34 GPM)
- raised exhaust controls: manual hand valves

C Special Attachments

please enquire



optimal 2500



Digging head:

upper rootball diameter, approx.	A	250 cm	(98")
rootball depth, approx	B	160 cm	(63")
working height	C	280 cm	(110")
working width, gate closed	D	291 cm	(115")
working width, gate open	E	325 cm	(128")
clearance between open gate	F	162 cm	(64")
inner frame diameter	G	178 cm	(70")
weight, empty		6.350 kg	(13,970 lbs.)
volume of rootball, approx.		3,5 m ³	(124 FT ³)
number of blades		5	

Special Features





- telescopic blade cylinders, self-lubricating bearings (abrasion-resistant), 4 folding-out spade towers

Superstructure:

transport height	H	285 cm	(111")
transport width	I	277 cm	(109")
min. length of truck platform	L	540 cm	(213")
overall length of superstructure (platform length + overhang)	K	620 cm	(244")
weight, empty		12.800 kg	(20,050 lbs.)

- Base frame (to be bolted to truck chassis),
- 2 articulated lift arms, digging head (as above), rotation of lift arm,
- 2 independently controlled rear stabilizers,
- hydraulic equipment complete with oil tank, hoses, cylinders and manually operated control valves

The purchaser must ensure that the combination of his truck and the Optimal tree spade is legal for highway use. Optimal-Vertrieb Opitz GmbH reserves the right to make changes in engineering, design and specifications

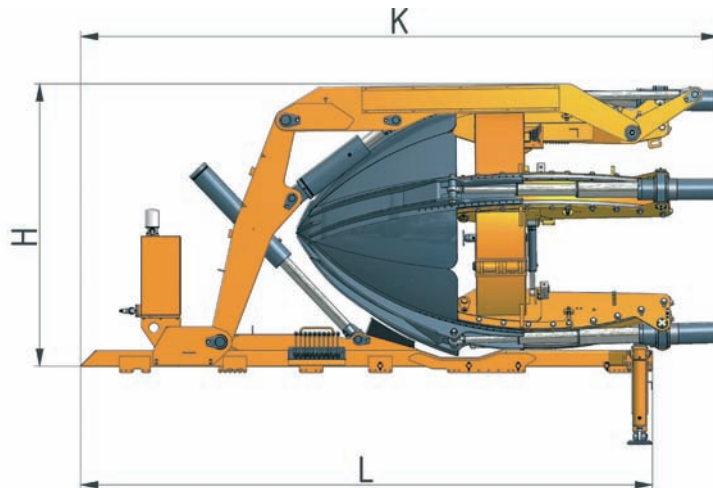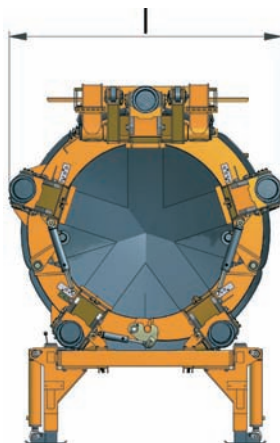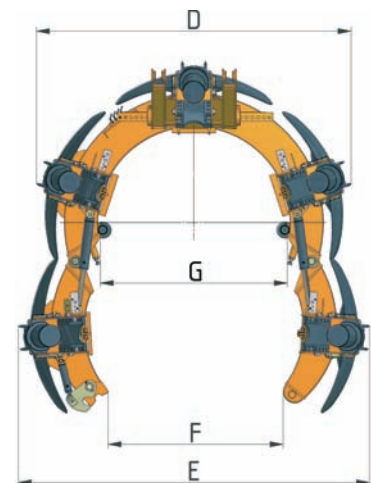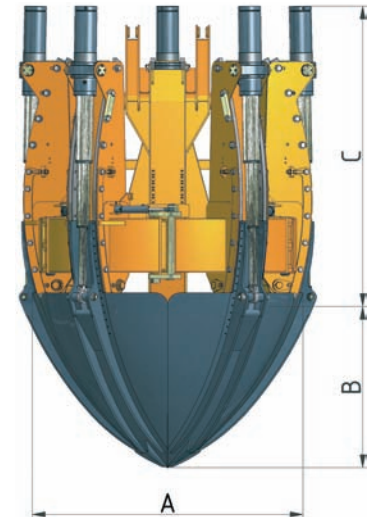

Manufacturer:



Optimal-Vertrieb Opitz GmbH
 Eysolden M 41
 91171 Thalmaessing
 Germany
 Phone +49 91 73/79 18 0
 Fax. +49 91 73/79 18 49
 info@opitz-optimal.com
 www.opitz-optimal.com